



- (51) **International Patent Classification:**  
H01S 3/00 (2006.01) H01S 3/11 (2006.01)
- (21) **International Application Number:**  
PCT/US2022/047967
- (22) **International Filing Date:**  
27 October 2022 (27.10.2022)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**  
63/272,364 27 October 2021 (27.10.2021) US
- (71) **Applicant: THE GOVERNMENT OF THE UNITED STATES OF AMERICA, as represented by THE SECRETARY OF THE NAVY [US/US];** Naval Research Laboratory, 875 North Randolph Street, Suite 1425, Arlington, VA 22203 (US).
- (72) **Inventor: HELLE, Michael, H.;** 2238 N Burlington St., Arlington, VA 22207 (US).
- (74) **Agent: BROOME, Kerry, L.;** US Naval Research Laboratory, 4555 Overlook Ave, SW, Code 1008.2, Washington, DC 20375 (US).
- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CV, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IQ, IR, IS, IT, JM, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.
- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, CV, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,

(54) **Title:** ADAPTIVE SPATIO-TEMPORAL OPTICAL PULSE SHAPER

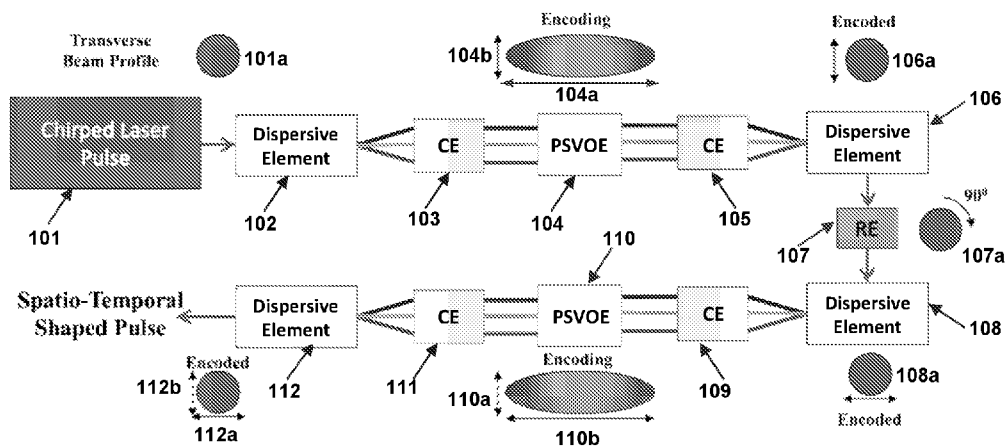


FIG. 1

(57) **Abstract:** A fully programmable laser field shaping apparatus that can configure a beam of laser pulses in both shape and time to generate laser pulses with varying spatio-temporal profiles for adaptive nonlinear optical propagation. The laser field shaping scheme in accordance with the present invention, Adaptive Spatio-Temporal Optical Pulse Shaper (A-STOPS), utilizes dispersive elements and a programmable spatial varying optical element (e.g. deformable mirror, spatial light modulator, etc.) to impose spatial variations on each frequency component of a laser pulse. Each frequency component maps directly to a temporal slice within a chirped laser pulse. The result is the ability to generate complex spatio-temporal variation on a laser pulse with wide ranging applications in linear and nonlinear optics.



DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,  
LV, MC, ME, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI,  
SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN,  
GQ, GW, KM, ML, MR, NE, SN, TD, TG).

**Published:**

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))*

# Adaptive Spatio-Temporal Optical Pulse Shaper

## 5 CROSS-REFERENCE

This Application claims the benefit of priority based on U.S. Provisional Patent Application No. 63/272,364 filed on October 27, 2021.

## FEDERALLY-SPONSORED RESEARCH AND DEVELOPMENT

10 The United States Government has ownership rights in this invention. Licensing inquiries may be directed to Office of Technology Transfer, US Naval Research Laboratory, Code 1004, Washington, DC 20375, USA; +1.202.767.7230; techtran@nrl.navy.mil, referencing Navy Case # 210618 .

## TECHNICAL FIELD

The present disclosure is related to the field of lasers and laser pulse shaping.

## 15 BACKGROUND ART

High-peak-power lasers are the driving technology behind fields such as laser machining, laser filamentation, fs-chemistry, and next-generation particle accelerators and light sources to name a few. Although many areas require dispersion compensation and/or transverse control (i.e. focusing), these are typically handled independently. As a result, a single pulse will have a fixed transverse profile applied over its whole-time history.

20 However, the laser field often evolves both spatially and temporally when propagating through or interacting with a nonlinear media. Full spatio-temporal tailoring is therefore desirable to enhance control of these nonlinear effects. Adaptive control is further desired for optimizing parameters for a fixed nonlinear media and/or necessary for any nonlinear media or laser source that is dynamically changing. This adaptive control is not currently available.

Current approaches rely on independently applying spatial control and temporal control of the laser pulse by using specialized optical elements to apply a spatio-temporal profile or by only applying shaping to one spatial dimension. *See* D. H. Froula, et al., “Flying focus: Spatial

and temporal control of intensity for laser-based applications,” *Physics of Plasmas* 26, 032109 (2019); S.W. Jolly et al., “Controlling the velocity of a femtosecond laser pulse using refractive lenses,” *Opt. Express* 28, 4888-4897 (2020); and Z. Li et al., “Theoretical method for generating regular spatiotemporal pulsed-beam with controlled transverse-spatiotemporal dispersion,” *Optical Communications*, vol. 432, pp. 91-96, (2019).

However, none of these approaches provides full spatio-temporal control of the laser field. Froula does not spatio-temporally shape the pulse but tries to use a combination of the two to provide some control. Although Jolly et al. does produce a spatio-temporal shaped pulse, their approach uses a fixed optical element that must be precisely produced with limited flexibility. And Li does not enable full spatio-temporal pulse shaping in both transverse dimensions.

#### DISCLOSURE OF THE INVENTION

This summary is intended to introduce, in simplified form, a selection of concepts that are further described in the Detailed Description. This summary is not intended to identify key or essential features of the claimed subject matter, nor is it intended to be used as an aid in determining the scope of the claimed subject matter. Instead, it is merely presented as a brief overview of the subject matter described and claimed herein.

The present invention provides a fully programmable laser field shaping apparatus that can controllably configure a beam of laser pulses in both shape and time to generate laser pulses with varying spatio-temporal profiles for adaptive nonlinear optical propagation.

The laser field shaping scheme in accordance with the present invention, Adaptive Spatio-Temporal Optical Pulse Shaper (A-STOPS), utilizes dispersive elements and a programmable spatial varying optical element (e.g. deformable mirror, spatial light modulator, etc.) to impose spatial variations on each frequency component of a laser pulse. Here each frequency component maps directly to a temporal slice within a chirped laser pulse. The result is the ability to generate complex spatio-temporal variation on a laser pulse with wide ranging applications in linear and nonlinear optics.

To illustrate the utility of such a device, a time-varying geometric focus can be applied such that the front and the back have a shorter focal length than the peak of the pulse. This is

of great utility for pulses undergoing Kerr nonlinear focusing where the peak of the pulse nonlinearly focuses sooner than the front and the back. By properly tailoring the spatio-temporal profile, all temporal portions of the pulse can focus at the same point. Enabling adaptive control is necessary for optimization and/or to correct for any pulse-to-pulse variations  
5 in the laser pulse or the nonlinear media.

#### BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a block schematic illustrating an exemplary Adaptive Spatio-Temporal Optical Pulse Shaper (A-STOPS) architecture in accordance with the present invention.

FIG. 2 is a block schematic illustrating an exemplary embodiment of a compact  
10 grating-based A-STOPS architecture using deformable mirrors to apply spatial information on a laser pulse in accordance with the present invention.

FIGS. 3A-3D show simulated beam profiles of a high-peak power laser undergoing nonlinear self-focusing without (FIGS. 3A and 3B) and with (FIGS. 5C and 5D) spatio-temporal shaping in accordance with the present invention.

#### 15 MODES FOR CARRYING OUT THE INVENTION

The aspects and features of the present invention summarized above can be embodied in various forms. The following description shows, by way of illustration, combinations and configurations in which the aspects and features can be put into practice. It is understood that the described aspects, features, and/or embodiments are merely examples, and that one skilled  
20 in the art may utilize other aspects, features, and/or embodiments or make structural and functional modifications without departing from the scope of the present disclosure.

The present invention provides a fully programmable laser field shaping element that can shape a laser pulse in both shape and time to generate laser pulses with varying spatio-temporal profiles for adaptive nonlinear optical propagation.

25 These and other aspects of the invention are described below with reference to the FIGURES, which are incorporated into and form a part of the present disclosure.

The laser field shaping scheme in accordance with the present invention, Adaptive Spatio-Temporal Optical Pulse Shaper (A-STOPS), utilizes dispersive elements and a programmable spatial varying optical element (e.g. deformable mirror, spatial light modulator, etc.) to impose spatial variations on each frequency component of a laser pulse. Here each frequency component maps directly to a temporal slice within a chirped laser pulse. The result is the ability to generate complex spatio-temporal variation on a laser pulse with wide ranging applications in linear and nonlinear optics.

The block schematic in FIG. 1 illustrates an exemplary embodiment of an apparatus that can be used to implement the A-STOPS laser field shaping scheme in accordance with the present invention.

As illustrated in FIG. 1, such an apparatus includes a laser source 101, Dispersive Elements 102, 106, 108, and 112, Collimating Elements (CE) 103, 105, 109, and 111, a rotating element 107, and Programmable Spatial Varying Optical Elements (PSVOE) 104 and 110.

Dispersive Elements 102, 106, 108, and 112 can be in the form of any suitable dispersive element such as a reflective/transmissive grating or prism, while Collimating Elements 103, 105, 109, and 111 can be any suitable optic such as a cylindrical optic or matching dispersive element, rotating element 107 can be any suitable 90 degree rotating element such as a an out-of-plane periscope or prism, and Programmable Spatial Varying Optical Elements 104 and 106 can be controllable optical elements such as controllably deformable mirrors or spatial light modulators.

In accordance with the present invention, laser source 101 produces a laser beam of temporally chirped laser pulses 101a, each pulse having a predetermined temporal beam profile consisting of time varying frequency content, or “temporal chirp.” Each temporally chirped pulse is directed into a first dispersive element, shown in FIG. 1 as Dispersive Element 102, which spatially spreads the pulse by spreading its frequency components in one transverse dimension.

The beam is then directed into a collimating element 103, which removes the angular components of the frequency spread applied by dispersive element 102 and collimates the spatially chirped pulses to produce a collimated, beam with spatially varying frequency, or

“spatial chirp”, in one dimension. The temporal information about the beam has now been mapped into each pulse’s beam’s spatial information along the dimension of the spatial chirp.

The collimated beam of spatially chirped pulses is then directed into PSVOE 104, e.g., a deformable mirror or other suitable optical element, which encodes a predetermined set of  
5 programmable information into each frequency by varying its phase and/or amplitude in a direction 104b perpendicular to the direction 104a of its spatial chirp to produce a beam of spatially encoded pulses. By encoding only in the direction perpendicular to the spatial chirp, no higher order dispersion is introduced, simplifying the application. To achieve this, the individual sub-elements of the PSVOE must be much smaller than the undispersed beam size  
10 and the element itself must be larger than the dispersed beam dimension.

The encoded spatial dispersion of the pulse 104a is then removed by a second collimating element 105, which applies an angular component to collect the frequency components and a second dispersive element 106, to remove the angular component from the frequencies and thus the spatial chirp from the pulses. This maps the spatial information back  
15 into temporal information, resulting in a predetermined, controllable encoded pulse 106a that carries a user-defined time-varying electric field profile of the pulse’s phase and amplitude in one spatial dimension. This user control over the characteristics of this encoded pulse is enabled via the first PSVOE, shown as PSVOE 104 in FIG. 1, which can be controlled by the device’s opto-mechanical properties and controls to provide a predetermined resolution and level of  
20 control on the applied spatial profile.

To access the perpendicular dimension of each pulse, the encoded pulse is then rotated 90 degrees by rotating element 107, e.g., a prism or periscope, to form rotated pulse 107a. The rotated pulse is then passed back through the system through a second set of optical elements corresponding to the first optical elements to impart predetermined temporal coding of  
25 information on the pulse.

Thus, as illustrated in FIG. 1, dispersive element 108 receives rotated, encoded pulse 108a and spatially spreads the pulse by spreading its frequency components in one transverse dimension. The pulses are passed to collimating element 109, that removes the angular components of the frequency spread, mapping temporal information into spatial information,

and then to PSVOE element 110, which further imparts a predetermined set of information onto each frequency by varying its phase and/or amplitude in dimension 110a perpendicular to the direction of its spatial chirp.

The thus-encoded pulses are then passed to collimating element 111, which collects the  
5 encoded spatially spread pulses and directs them to dispersive element 112. Dispersive element then removes any remaining angular dispersion of the frequencies from the encoded pulses, mapping spatial information back to temporal information, producing a beam of fully encoded spatio-temporally shaped pulses that are encoded in both spatial dimensions 112a and 112b.

The optical elements of such an apparatus in accordance with the present invention can  
10 each apply the same or a different spatial variation on the pulses in the beam to impart symmetric or asymmetric transverse information on the beam. Combining this device with a programmable dispersive element such as an acoustic-optical programmable dispersive filter allows for the generation of pulses with arbitrary spatio-temporal profiles. This could be achieved at refresh rates upwards of 10kHz using currently available components.

15 An example of how the spatio-temporal programming of a laser pulse in accordance with the present invention can be implemented in a more compact scheme using actual optical elements is given in FIG. 2.

FIG. 2 illustrates an exemplary compact grating-based A-STOPS apparatus that uses gratings as the Dispersive Elements and deformable mirrors as the PSVOE described above to  
20 apply spatial information to the laser pulse. This setup is ideal for high energy pulses since it relies only on reflective optics that have higher damage thresholds and minimize nonlinear effects.

In this apparatus, the two grating elements, Grating #1 (201a) and Grating #2 (201b), are used as the Dispersive Elements and Collimating Elements described above, i.e., to spatially  
25 disperse and collimate the frequency content of the broadband beam. Controllably Deformable Mirror 202 acts as the PSVOE elements described above to encode spatially varying information onto the pulse and return the pulse back through the grating pair, converting the spatial frequency dispersion into a temporal dispersion. The beam is then rotated  $90^0$  and passed back through the system, i.e., to Grating #1 (201a) and #2 (201b), wherein the beam is again

displaced by Deformable Mirror 202 so that spatial information independent from the information applied on the first pass can be encoded. The beam exiting the system after this second pass is fully spatio-temporal shaped.

The reflective optics and deformable mirror are used to increase power handling and prevent nonlinearities occurring within transmissive optics. It should be noted that although the embodiment illustrated in FIG. 2 relies on two grating elements (Gratings #1 and #2 in the FIGURE), in other embodiments, the dispersion and collimation could be done using multiple dispersive elements or even a single one with modification to the beam routing optics. In other embodiments, transmission optics and/or other programmable optics can be substituted for lower power applications.

#### Example

To illustrate the effects that such pulse shaping have on a nonlinearly propagating beam, fully 3-D simulations of the apparatus and method of the present invention were run using the PyCAP nonlinear propagation code developed at the U.S. Naval Research Laboratory. For this simulation, a 40cm x 40cm x 40ps box on a 512 x 512 x 512 grid was used to simulate the propagation of an 800nm, 10ps long pulse with a  $P/P_{\text{Crit}} = 12$  and an initial Gaussian spot size, where  $P_{\text{Crit}}$  is the critical power for Kerr nonlinear self-focusing, typically  $\sim 5\text{GW}$  in air. The long pulse used was used to minimize nonlinear temporal effects and to better model a chirped pulse. Dispersion was not included in these simulations.

Two pulses were modeled.

The first modeled pulse had no spatio-temporal shaping and collapsed nonlinearly after a distance,  $L_{\text{Range}}$ , a predetermined desired range for the laser beam.

The second modeled pulse had a time varying focus  $f_i(t)$  such that

$$\frac{1}{f_t(t)} = \frac{1}{L_{\text{Range}}} - \frac{1}{f_{\text{NL}}(t)}$$

where

$$f_{NL}(t) \sim \frac{\pi R_0^2}{2 \lambda \sqrt{P(t)} / (P_{Crit})^{-1}},$$

and where  $L_{Range}$  is a predetermined desired range for the laser beam,  $R_0$  is the initial beam size,  $\lambda$  is the central wavelength of the pulse, and  $P(t)$  is its time varying power.

FIGS. 3A and 3B show the results of this modeling for a pulse with no shaping, while  
 5 FIGS. 3C and 3D show the results for a pulse that has undergone spatio-temporal shaping in accordance with the present invention. FIGS. 3A and 3C show the transverse profile of these pulses, while FIGS. 3B and 3D show a slice of the pulse in  $y$  and time.

As shown in FIGS. 3A and 3C, the beam energy contained within the central spot of a pulse 3C that has been spatio-temporally shaped in accordance with the present invention  
 10 shows a 2.5x increase as compared to an unshaped pulse 3A.

FIGS. 3B and 3D show the beam energy distribution in the time domain. As shown in FIG. 3B, without pulse shaping, the laser pulse energy at the front (left hand side) and rear (right hand side) is poorly concentrated and thus produces a lower intensity at the center of the beam (along the  $y = 0$  cm line). In contrast, as shown in FIG. 3D, the energy at the front and  
 15 rear of the shaped pulse is significantly more concentrated, producing higher intensity at the center of the beam (along the  $y = 0$  cm line).

#### ADVANTAGES AND NEW FEATURES

There is no known technique that provides the flexibility for producing high power spatio-temporal shaped laser pulses provided by the present invention.

20 The Adaptive Spatio-Temporal Optical Pulse Shaper (A-STOPS) apparatus and method of the present invention allows for the active encoding of varying spatial profiles on the full-time history of a chirped pulse. This is done by combining the ability of a chirped pulse stretcher to convert time to space and back with the ability of a programmable spatial varying optical element to apply arbitrary spatial field profiles to the pulse.

25 To illustrate the utility of such a device, a time-varying geometric focus can be applied such that the front and the back have a shorter focal length than the peak of the pulse.

See Froula et al., *supra*. This is of great utility for pulses undergoing Kerr nonlinear focusing where the peak of the pulse nonlinearly focuses sooner than the front and the back. By properly tailoring the spatio-temporal profile, all temporal portions of the pulse can focus at the same point, enabling the adaptive control necessary for optimization and/or correction for any pulse-to-pulse variations in the laser pulse or the nonlinear media.

As discussed above, using fixed tailored optics or programming in one dimension are the only methods currently available to spatio-temporally shape pulses. While these approaches can produce spatio-temporal profiles in the pulse, they lack flexibility, with any changes in requirements due to upstream optics or interactions requiring that a new set of optics be made.

In summary, the A-STOPS apparatus and method in accordance with the present invention provides the ability to obtain programmable spatio-temporal chirped pulses for adaptive control of nonlinear pulses. Such an approach is general and can be adapted to any chirped laser system operating at any arbitrary wavelength and/or repetition rate.

Although particular embodiments, aspects, and features have been described and illustrated, one skilled in the art would readily appreciate that the invention described herein is not limited to only those embodiments, aspects, and features but also contemplates any and all modifications and alternative embodiments that are within the spirit and scope of the underlying invention described and claimed herein. The present application contemplates any and all modifications within the spirit and scope of the underlying invention described and claimed herein, and all such modifications and alternative embodiments are deemed to be within the scope and spirit of the present disclosure.

What is claimed is:

1. An adaptive spatio-temporal optical pulse shaper (A-STOPS) apparatus, comprising:

5 a laser source that emits a beam of laser pulses, each having a predetermined temporal chirp comprising a plurality of frequency components;

a first dispersive element that receives the beam of laser pulses and spatially spreads each pulse in the beam by spreading the frequency components of the laser pulse spatially in one transverse dimension to produce a plurality of spatially chirped pulses;

10 a first collimating element that receives the spatially chirped pulses from the first dispersive element, removes the angular spreading of the frequency components from each pulse, and collimates the spatially chirped pulses to produce a first collimated beam where temporal information about the beam is mapped into each pulse's spatial information;

15 a first programmable spatial varying optical element that encodes first predetermined programmable information onto each pulse by varying its phase and/or amplitude in a direction perpendicular to a direction of the pulse's spatial chirp to produce a beam of spatially encoded pulses;

a second collimating element that receives the beam of spatially encoded pulses and angularly collects the frequency components of each pulse to remove the spatial chirp of the spatially encoded pulses;

20 a second dispersive element that receives the beam of spatially encoded pulses and removes any residual angular dispersion from the beam of spatially encoded pulses to produce a second collimated beam where frequency dependent spatial information about the beam is mapped into each pulse's temporal information producing predetermined, controllable non-dispersed beam of spatially encoded pulses that each carry a user-defined time-varying electric  
25 field profile of the pulse's phase and amplitude in one spatial dimension;

a rotating element that receives the beam of spatially encoded pulses from the second dispersive element and rotates each of the pulses 90 degrees;

a third dispersive element that receives the rotated pulses from the rotating element and spatially spreads each pulse in the beam by spreading the frequency components of the laser

pulse spatially in one transverse dimension parallel to the encoding to produce a plurality of spatially chirped pulses;

a third collimating element that receives the beam of temporally dispersed pulses from the third dispersive element and removes the angular spreading of the frequency components from each pulse, and collimates the spatially chirped pulses to produce a first collimated beam where temporal information about the beam is mapped into the dimension parallel to encoding of the pulses;

a second programmable spatial varying optical element that receives the collimated beam of spatially chirped pulses and encodes second predetermined programmable information onto each spatially chirped pulse by varying its phase and/or amplitude in a direction perpendicular to a direction of the pulse's spatial chirp to produce a beam of pulses encoded in both dimensions;

a fourth collimating element that receives the beam of spatially encoded pulses and angularly collects the frequency components of each pulse to remove the spatial chirp of the spatially encoded pulses; and

a fourth dispersive element that removes any residual angular dispersion from the beam of spatially encoded pulses to produce a fourth collimated beam where frequency dependent spatial information about the beam is mapped into each pulse's temporal information produce a beam of fully encoded spatio-temporally shaped pulses that are encoded in both spatial dimensions.

2. A method for forming a beam of spatio-temporally shaped laser pulses, comprising:

emitting, from a laser source, a beam of laser pulses, each having a predetermined temporal chirp comprising a plurality of frequency components;

directing the beam of temporally chirped laser pulses into a first dispersive element that receives the beam of laser pulses and spatially spreads each pulse in the beam by spreading the frequency components of the laser pulse spatially in one transverse dimension to produce a plurality of spatially chirped pulses;

directing the spatially chirped pulses from the first dispersive element into a first collimating element removes the angular spreading of the frequency components from each pulse, and collimates the spatially chirped pulses to produce a first collimated beam where temporal information about the beam is mapped into each pulse's spatial information;

5 directing the first collimated beam into a first programmable spatial varying optical element that encodes first predetermined programmable information onto each pulse by varying its phase and/or amplitude in a direction perpendicular to a direction of the pulse's spatial chirp to produce a beam of spatially encoded pulses;

10 directing the beam of spatially encoded pulses into a second collimating element receives the beam of spatially encoded pulses and angularly collects the frequency components of each pulse to remove the spatial chirp of the spatially encoded pulses;

15 directing the beam of spatially encoded pulses into a second dispersive element removes any residual angular dispersion from the beam of spatially encoded pulses to produce a second collimated beam where frequency dependent spatial information about the beam is mapped into each pulse's temporal information producing predetermined, controllable non-dispersed beam of spatially encoded pulses that each carry a user-defined time-varying electric field profile of the pulse's phase and amplitude in one spatial dimension;

directing the non-dispersed beam of spatially encoded pulses into a rotating element that rotates each of the pulses 90 degrees;

20 directing the rotated pulses from the rotating element into a third dispersive element that spatially spreads each pulse in the beam by spreading the frequency components of the laser pulse spatially in one transverse dimension parallel to the encoding to produce a plurality of spatially chirped pulses;

25 directing the beam of spatially chirped pulses into a third collimating element that receives the beam of temporally dispersed pulses from the third dispersive element and removes the angular spreading of the frequency components from each pulse, and collimates the spatially chirped pulses to produce a first collimated beam where temporal information about the beam is mapped into the dimension parallel to encoding of the pulses;

30 directing the collimated beam of spatially chirped encoded pulses into a second programmable spatial varying optical element encodes second predetermined programmable

information onto each spatially chirped pulse by varying its phase and/or amplitude in a direction perpendicular to a direction of the pulse's spatial chirp to produce a beam of pulses encoded in both dimensions;;

5 directing the beam of spatially and temporally encoded pulses into a fourth collimating element that receives the beam of spatially encoded pulses and angularly collects the frequency components of each pulse to remove the spatial chirp of the spatially encoded pulses; and

10 directing the collimated beam of spatially and temporally encoded pulses into a fourth dispersive element that removes any residual angular dispersion from the beam of spatially encoded pulses to produce a fourth collimated beam where frequency dependent spatial information about the beam is mapped into each pulse's temporal information produce a beam of fully encoded spatio-temporally shaped pulses that are encoded in both spatial dimensions.

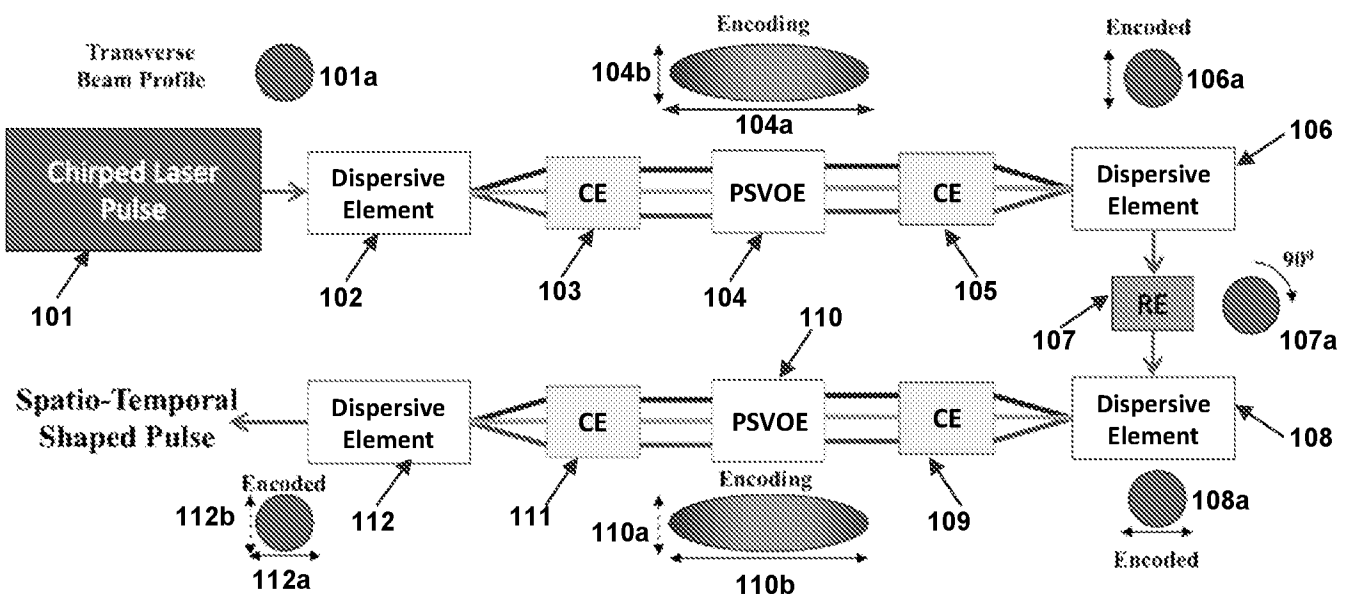


FIG. 1

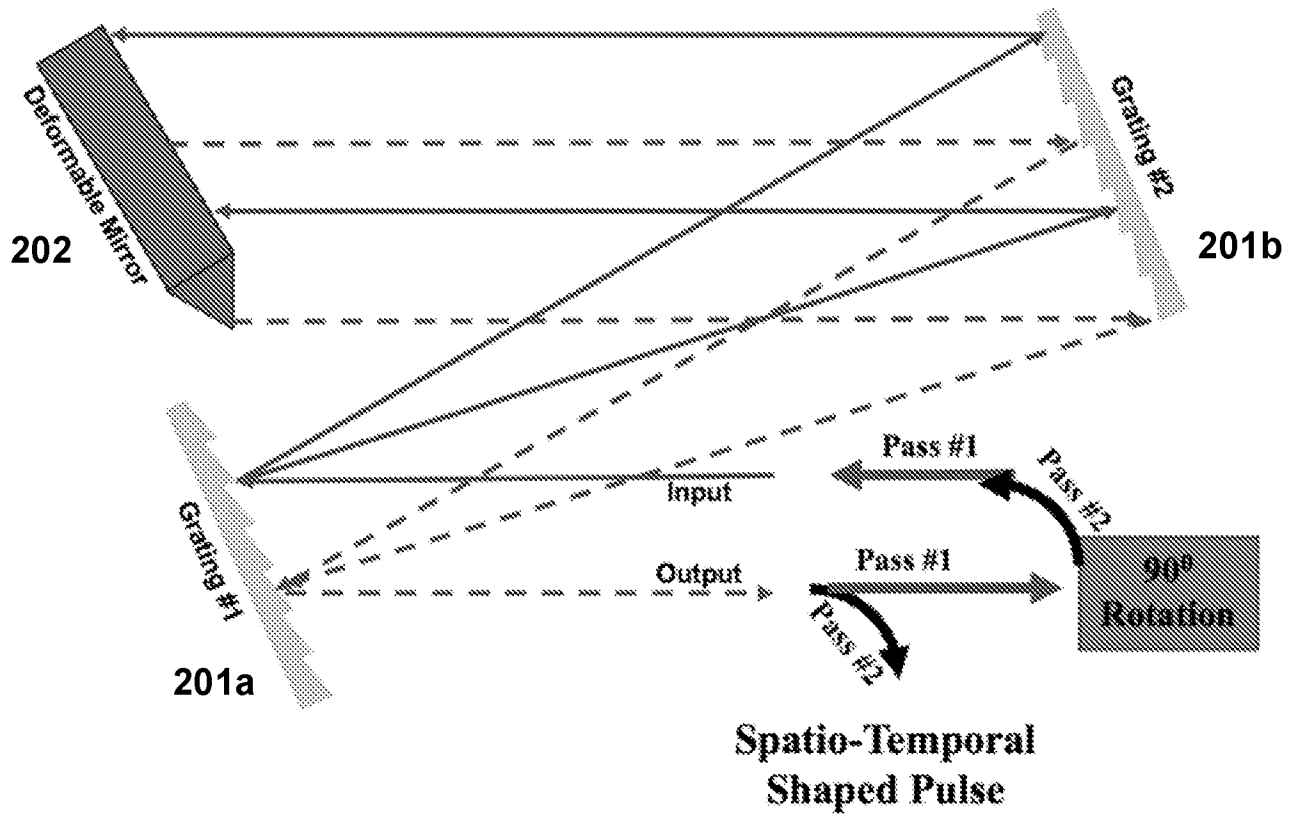


FIG. 2

FIG. 3A

FIG. 3B

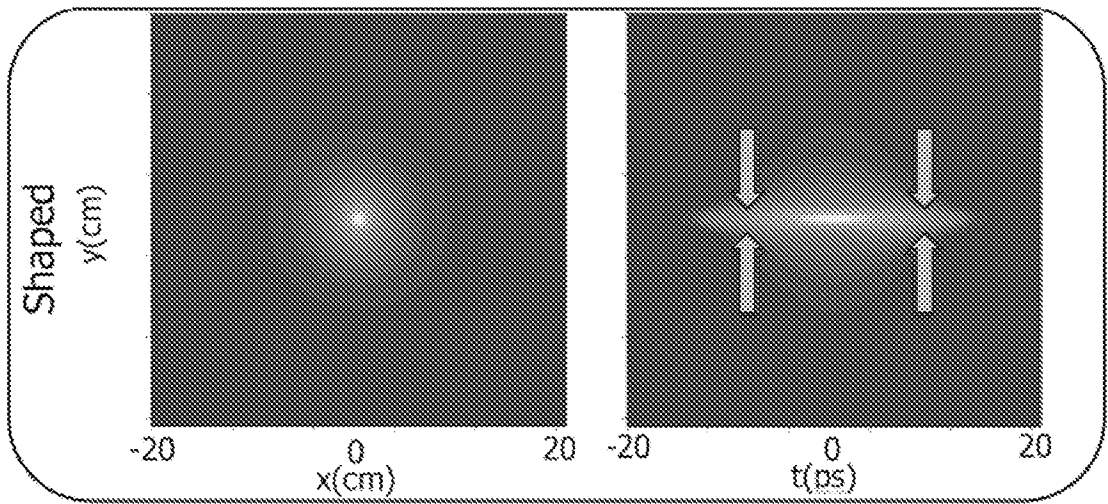
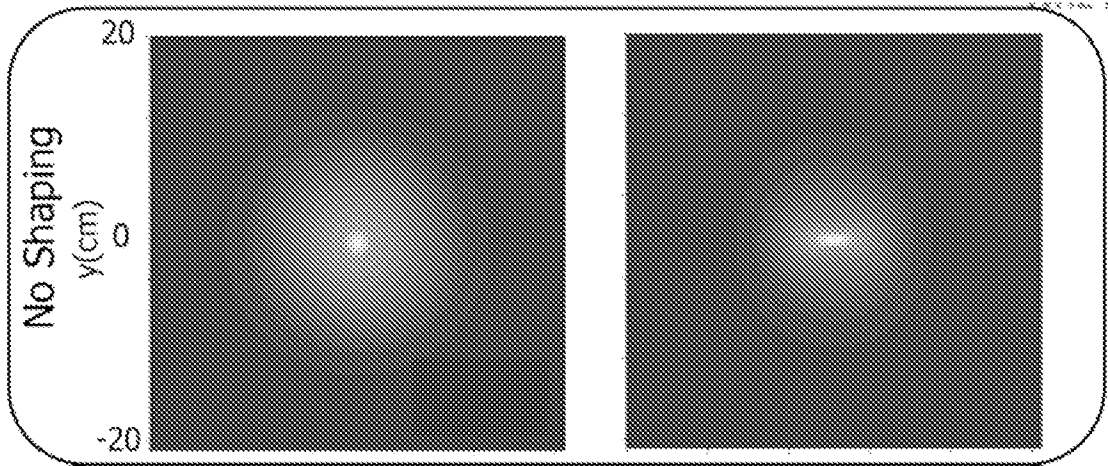


FIG. 3C

FIG. 3D

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/US2022/047967

<b>A. CLASSIFICATION OF SUBJECT MATTER</b>		
H01S 3/00(2006.01)i; H01S 3/11(2006.01)i		
According to International Patent Classification (IPC) or to both national classification and IPC		
<b>B. FIELDS SEARCHED</b>		
Minimum documentation searched (classification system followed by classification symbols) H01S 3/00(2006.01); G02B 21/00(2006.01); H01S 3/10(2006.01); H01S 3/30(2006.01)		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Korean utility models and applications for utility models Japanese utility models and applications for utility models		
Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) eKOMPASS(KIPO internal) & Keywords: laser, dispersive element, collimating element, encode, rotating element		
<b>C. DOCUMENTS CONSIDERED TO BE RELEVANT</b>		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2009-0122819 A1 (MARCOS DANTUS et al.) 14 May 2009 (2009-05-14) paragraphs [0036]-[0038]; and figure 15.	1-2
A	US 2016-0294146 A1 (THE UNIVERSITY OF HONG KONG) 06 October 2016 (2016-10-06) claim 1; and figures 1, 11-12C.	1-2
A	US 7561605 B1 (PETER J. DELFYETT et al.) 14 July 2009 (2009-07-14) column 13, lines 57-62; and figure 32.	1-2
A	KR 10-2019-0127921 A (IPG PHOTONICS CORPORATION) 13 November 2019 (2019-11-13) claim 5; and figure 5.	1-2
A	WO 2012-164483 A1 (COMMISSARIAT A L'ENERGIE ATOMIQUE ET AUX ENERGIES ALTERNATIVES) 06 December 2012 (2012-12-06) claim 1.	1-2
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.		
* Special categories of cited documents: "A" document defining the general state of the art which is not considered to be of particular relevance "D" document cited by the applicant in the international application "E" earlier application or patent but published on or after the international filing date "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "O" document referring to an oral disclosure, use, exhibition or other means "P" document published prior to the international filing date but later than the priority date claimed "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art "&" document member of the same patent family		
Date of the actual completion of the international search <b>03 March 2023</b>		Date of mailing of the international search report <b>03 March 2023</b>
Name and mailing address of the ISA/KR <b>Korean Intellectual Property Office 189 Cheongsa-ro, Seo-gu, Daejeon 35208, Republic of Korea</b> Facsimile No. +82-42-481-8578		Authorized officer <b>HONG, Kee Wan</b> Telephone No. +82-42-481-5003

**INTERNATIONAL SEARCH REPORT**  
**Information on patent family members**

International application No.

**PCT/US2022/047967**

Patent document cited in search report			Publication date (day/month/year)	Patent family member(s)			Publication date (day/month/year)
US	2009-0122819	A1	14 May 2009	CN	1943083	A	04 April 2007
				EP	1556930	A2	27 July 2005
				EP	1556930	A4	11 November 2009
				EP	1723704	A1	22 November 2006
				EP	1723704	B1	08 July 2009
				EP	1782452	A2	09 May 2007
				EP	1905060	A2	02 April 2008
				EP	2089767	A2	19 August 2009
				EP	2341587	A2	06 July 2011
				EP	2341587	A3	28 March 2012
				EP	2341587	B1	04 June 2014
				JP	2006-502407	A	19 January 2006
				JP	2007-526521	A	13 September 2007
				JP	2008-505344	A	21 February 2008
				JP	2009-500856	A	08 January 2009
				JP	2011-022589	A	03 February 2011
				JP	4800621	B2	26 October 2011
				US	2003-0099264	A1	29 May 2003
				US	2004-0089804	A1	13 May 2004
				US	2004-0233944	A1	25 November 2004
				US	2005-0021243	A1	27 January 2005
				US	2005-0232317	A1	20 October 2005
				US	2006-0056468	A1	16 March 2006
				US	2006-0187974	A1	24 August 2006
				US	2009-0238222	A1	24 September 2009
				US	2009-0256071	A1	15 October 2009
				US	2009-0257464	A1	15 October 2009
				US	7105811	B2	12 September 2006
				US	7439497	B2	21 October 2008
				US	7450618	B2	11 November 2008
				US	7567596	B2	28 July 2009
				US	7583710	B2	01 September 2009
				US	7609731	B2	27 October 2009
				US	7973936	B2	05 July 2011
				US	8208504	B2	26 June 2012
				US	8208505	B2	26 June 2012
				US	8265110	B2	11 September 2012
				US	8300669	B2	30 October 2012
				WO	02-061799	A2	08 August 2002
				WO	02-061799	A3	20 March 2003
				WO	2004-034524	A3	29 July 2004
				WO	2005-088783	A1	22 September 2005
				WO	2007-001308	A2	04 January 2007
				WO	2007-001308	A3	15 January 2009
				WO	2007-008615	A2	18 January 2007
				WO	2007-008615	A3	20 March 2008
				WO	2007-028119	A2	08 March 2007
				WO	2007-028119	A3	09 August 2007
				WO	2008-063602	A2	29 May 2008
				WO	2008-063602	A3	06 November 2008

**INTERNATIONAL SEARCH REPORT**  
**Information on patent family members**

International application No.

**PCT/US2022/047967**

Patent document cited in search report			Publication date (day/month/year)	Patent family member(s)			Publication date (day/month/year)
US	2016-0294146	A1	06 October 2016	CN	107534261	A	02 January 2018
				CN	107534261	B	19 March 2021
				CN	113161851	A	23 July 2021
				US	10211587	B2	19 February 2019
				WO	2016-155191	A1	06 October 2016
-----							
US	7561605	B1	14 July 2009	US	7095772	B1	22 August 2006
				US	7558302	B1	07 July 2009
-----							
KR	10-2019-0127921	A	13 November 2019	CN	110476307	A	19 November 2019
				CN	110476307	B	18 May 2021
				EP	3586410	A1	01 January 2020
				EP	3586410	A4	16 December 2020
				JP	2020-516073	A	28 May 2020
				JP	7189146	B2	13 December 2022
				KR	10-2444028	B1	15 September 2022
				US	2020-127430	A1	23 April 2020
				WO	2018-183683	A1	04 October 2018
-----							
WO	2012-164483	A1	06 December 2012	EP	2715885	A1	09 April 2014
				EP	2715885	B1	29 July 2015
-----							